
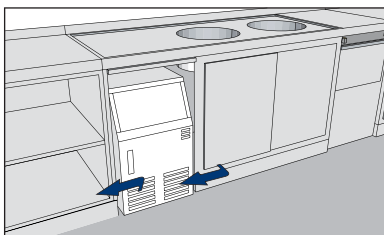



## Self Contained Ice Machine up to 10 Kg



### Features

- Produces individual Gourmet crystal clear supercubes
- Plug-n-play: does not require plumbing.
- (Bottled) Water is hand-poured into reservoir. Ideal for areas with poor water quality.
- Water forming from melting ice cubes in the storage bin is re-circulated into reservoir.
- Front panel water reservoir level indicator
- Up to 10 kg (22 lbs) daily ice cubes production
- Up to 3,5 kg (7,7 lbs) ice storage capacity
- Hygienic ABS plastic exterior
- Simple and reliable electro-mechanic controls
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Ergonomically designed ice storage access, with disappearing door
- AgION antimicrobial agent embedded in selected molded plastics parts
- CFC-free R-134a Refrigerant
- 3 years manufacturer warranty

### ACM 25 Technologies



		24h					
		10°: 10°C					
ACM 25 AE		[kg] [lbs] N°	[kg] [lbs] N°	[kg] [lbs] N°	[kg] [lbs] N°	[WxDxH mm]	[WxDxH inches]
		10 22 500	9 20 450	3,5 7,7 175		386x380x640	14" x 14" x 25"
						[v/Hz/ph]	R 134a
						230/50/1	

\*Estimate number of medium size gourmet cubes.

This product qualifies for the following listings:



Medium Gourmet  
20 g



Ø 29 x H 34 mm

**3** Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)  
[www.scotsman-ice-on-tablet.com](http://www.scotsman-ice-on-tablet.com)

Models and specifications are subject to change without notice.

## Self Contained Ice Machine up to 10 Kg

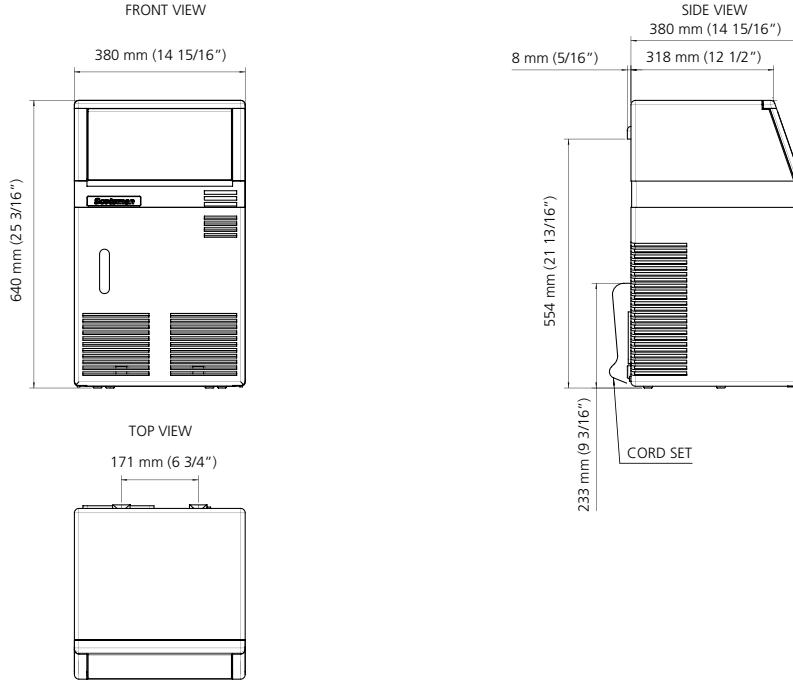

### AC M 25 AE AIR COOLED

10°C	10	kg
50°F	22	lbs
21°C	9	kg
70°F	20	lbs
32°C	6.5	kg
90°F	14	lbs
38°C	5	kg
100°F	11	lbs

### AC M 25 AE MARINE AIR COOLED

10°C	10	kg
50°F	22	lbs
20°C	9	kg
70°F	20	lbs
30°C	7	kg
86°F	15	lbs
35°C	6	kg
95°F	13	lbs

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

AC M 25 AE	Icon	[Btu/h]	[W]	[Ømm <sup>2</sup> ]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
AC M 25 AE		2250	660	3x1	250	10	n.a.	5.5	1.5	30	66	33	72