

Gourmet Cube Ice Machine up to 300Kg



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 300 kg (661 lbs) daily ice cubes production
- ABS plastic top cover
- "Universal Standard 30" width fits on most popular ice storage bins
- Resistant stainless steel exterior
- Computer controlled with advanced diagnostics capabilities
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 2 years manufacturer warranty



MC46 with SB 550
(sold separately)



MC46 with SB 1025
(sold separately)



Double stack
(needs stacking kit
sold separately)




Electronic



ABS plastic cover

MC 46 Technologies



	 10°: 10°C 21°: 15°C	10°: 10°C		21°: 15°C		 [WxDxH mm] 1079x539x874 [WxDxH inches] 42 1/2" x 21 1/4" x 34 7/16"		
		[kg]	[lbs]	N°	[kg]		[lbs]	N°
MC S 46 AS		280	617	35000	270	595	33750	 [w/Hz/ph] 230/50/1 400/50/3N R 404 A
MC S 46 WS		270	595	33750	260	573	32500	
MC M 46 AS		300	661	15000	280	617	14000	 [w/Hz/ph] 230/50/1 400/50/3N R 404 A
MC M 46 WS		300	661	15000	290	639	14500	
MC L 46 AS		295	650	7560	285	628	7310	 [w/Hz/ph] 230/50/1 400/50/3N R 404 A
MC L 46 WS		285	628	7310	275	606	7050	
MCXL 46 AS		210	463	3500	195	430	3250	 [w/Hz/ph] 230/50/1 400/50/3N R 404 A
MCXL 46 WS		230	507	3830	220	485	3670	

*Estimated number of cubes

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Gourmet Cube Ice Machine up to 300Kg

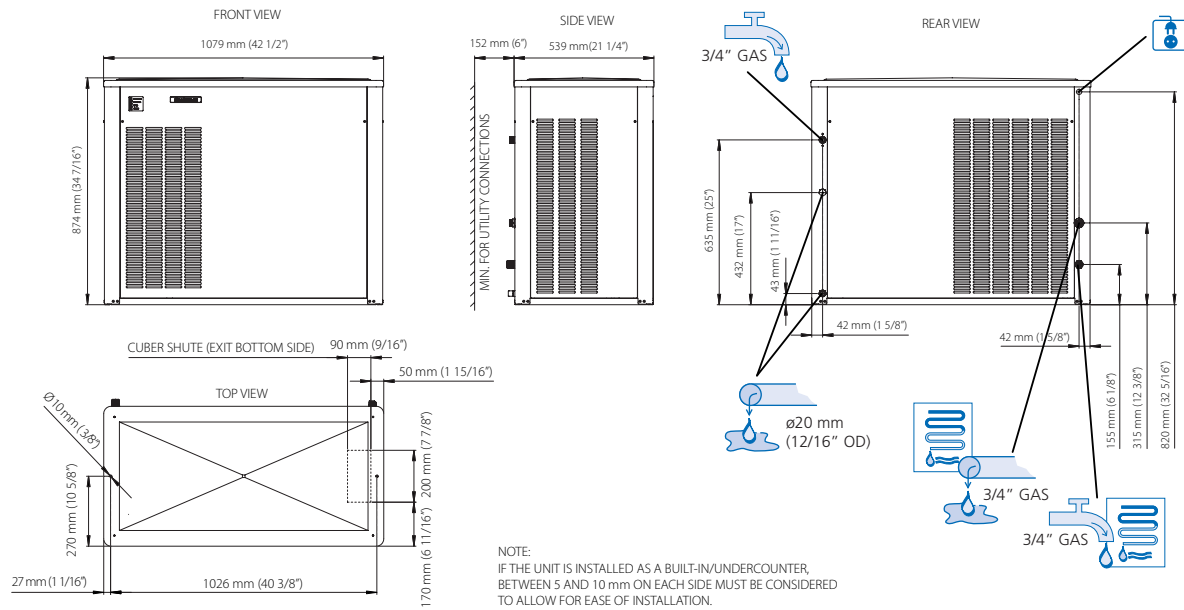

MC 46 AIR COOLED

°C \ °F	50°	60°	70°	90°	
	10°	15°	21°	32°	
10°	310	300	290	270	kg
50°	683	661	639	595	lbs
21°	300	290	280	260	kg
70°	661	639	617	573	lbs
32°	250	240	230	210	kg
90°	551	529	507	463	lbs
38°	220	210	200	180	kg
100	485	463	441	397	lbs

MC 46 WATER COOLED

°C \ °F	50°	60°	70°	90°	
	10°	15°	21°	32°	
10°	300	290	280	260	kg
50°	661	639	617	573	lbs
21°	290	280	270	250	kg
70°	639	617	595	551	lbs
32°	280	270	260	240	kg
90°	617	595	573	529	lbs
38°	270	260	250	230	kg
100	595	573	551	507	lbs

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Temperature Range	Capacity	Dimensions	Power	FUSE	Energy	Water	Ice	Weight
	[°C] / [°F]	[Btu/h] [W]	[Ø mm]	[W]		[kWh] - 100 Kg	[l/h] [gal/h]	[kg] [lbs]	[kg] [lbs]
MC S 46 AS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2400	20 A	n.a.	27.5 7.3	110 242	125 275
MC S 46 WS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2400	20 A	n.a.	215 56.8	105 231	120 264
MC M 46 AS	5°C - 32°C	25250 7400	3x1.5 - 5x1.5	2300	20 A	23,7	26,6 7	110 242	125 275
MC M 46 WS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2400	20 A	n.a.	215 56.8	105 231	120 264
MC L 46 AS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2400	20 A	n.a.	27.5 7.3	110 242	125 275
MC L 46 WS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2400	20 A	n.a.	215 56.8	105 231	120 264
MCXL 46 AS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2200	20 A	n.a.	40.5 10.7	108 238	123 271
MCXL 46 WS	5°C - 32°C	24900 7300	3x1.5 - 5x1.5	2200	20 A	n.a.	178 47	103 227	118 260