


MV Cube Ice Machines up to 220 Kg



Features

- "Global Standard" width - 30" (76.20 cm) wide
- Auto-Alert indicator lights - communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- Front-facing Evaporator - Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- Embedded antimicrobial - Ag-Ion® antimicrobial is present in selected food-zone components
- External Components - All external panel components are crafted for optimal aesthetic appeal through superior fit and finish
- Reusable air filter is easily removable from the outside for ease of cleaning (in air-cooled models).
- California Energy Commission- meets or exceeds CEC guidelines.
- R290 gas charge not exceeding 150 grams, in compliance with European Laws.

MV460 Technologies



MV460+SB393
(sold separately)



MV460+SB530
(sold separately)



MV460+SB948+KBTB948
(sold separately)



MV460+SB1025
(sold separately)

	 21°: 10°C 32°: 21°C [kg] [lbs] N° [cubes]*	24h		 [kg] [lbs] N° [cubes]*	 [WxDxH mm] 768x620x573
		 [kg] [lbs] N° [cubes]*	 [kg] [lbs] N° [cubes]*		
MV 460 AS	 205 451 20500	150	331 15000	 [WxDxH inches] 30 3/16"x24 7/16"x22 9/16"	
MVH 460 AS	205 451 20500	150	331 25000	 [v/Hz/ph] 220-240/50/1	
				 R 290	

This product qualifies for the following listings:



Medium Cube - 10 g
W 23 x D 23 x H 26 mm



Small Cube - 6 g
W 11 x D 23 x H 26 mm

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

MV Cube Ice Machines up to 220 Kg

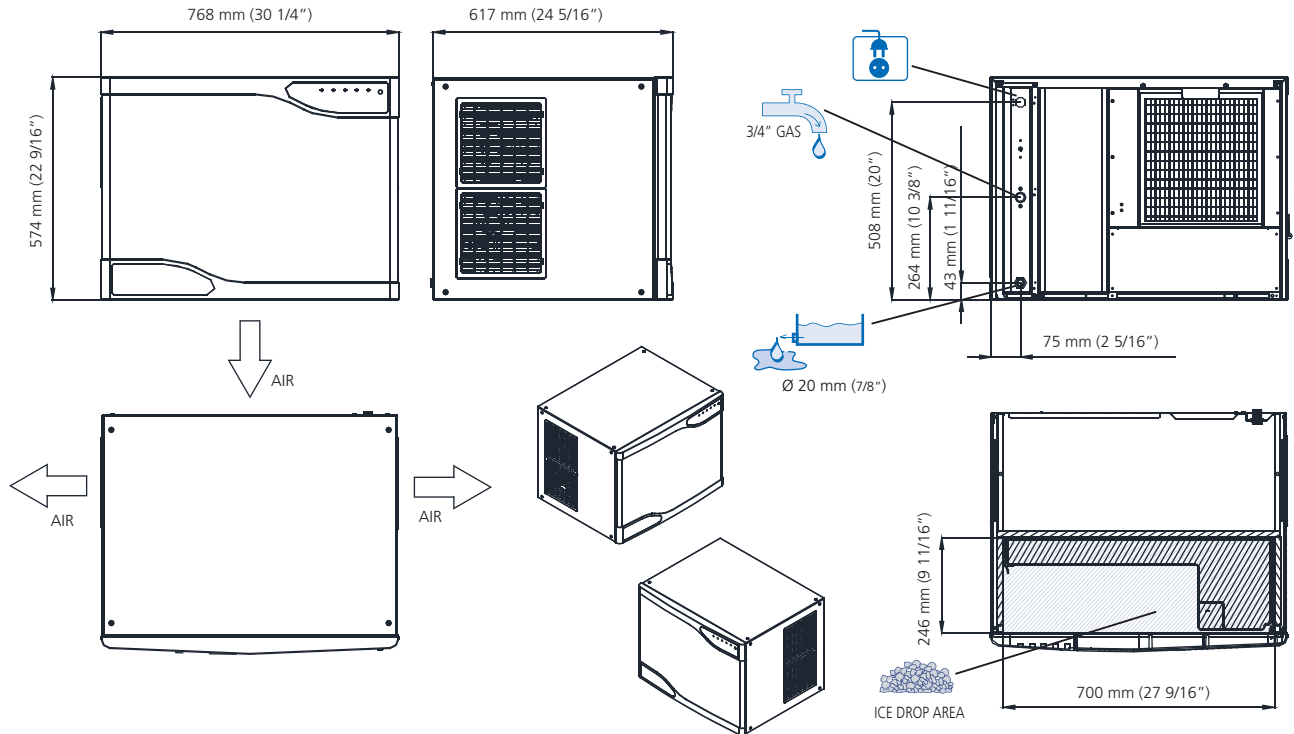

MV460 AIR COOLED

	50° °C 10° °F	60° °C 15° °F	70° °C 21° °F	90° °C 32° °F	
10°	220	214	200	172	kg
50°	485	472	441	379	lbs
21°	205	200	186	163	kg
70°	451	441	410	359	lbs
32°	160	155	150	131	kg
90°	353	342	331	289	lbs
38°	136	133	129	116	kg
100	299	293	284	257	lbs

24h

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	32°C 90°F 21°C 70°F	[kg] [lbs]	[kg] [lbs]
MV 460 AS	✂	9702 2843	3x1,5	1100	16 A	13,8	12 3,2	66 145	80 176	
MVH 460 AS	✂	9702 2843	3x1,5	1100	16 A	13,8	12 3,2	68 145	80 176	

CONTACT POINTS:

Europe
Scotsman Europe-Frimont S.p.A.
Ph/Fax +39-0293960208 / 0293960201
scotsman.europe@frimont.it
Paolo Moro

Middle East & N. Africa
Scotsman-Frimont Regional Office (ME/NA)
Ph/Fax +97-16 5262944 / 165262946
m.dawood@frimont.ae
fernando.m@frimont.ae

Asia and Pacific
Scotsman Industries (S) PTE. L.T.D.
Ph/Fax +65-67385393 / 67381959
scotsman@scotsman.com.sg
Andrea Tronci

South Africa
Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd
Ph +27-0105900609 / 0877200245/6/7/8
Fax: +27-118264123 / 0866340803
stuart@scotsmansa.co.za - jennifer@scotsman.co.za

India
Scotsman Group India
Ph/Fax : +91-1244002459 / direct 9560072459
david.owen@scotsman.com.sg

Spain
Scotsman España, S.L.U. c/ Galapagar, 12
Ph/Fax +34-911109796 / 916337423
scotsman@scotsman-espana.es
Daniel Doblado

China
Scotsman Ice Systems (Shanghai)
Ph/Fax : +86-2161313200 / 2161313330
scotsman.shanghai@scotsman-china.com
Andrew Clayton