

Pressure Water Cooler



Standard Features

- Refrigerated drinking water fountain, USPH-S Regulations Compliant.
- Includes front push-pad to activate the flow of water.
- Delivers 50 liters per hour (13.2 gph) of 8°-12°C (46°-53°F) water (at 32°C-90°F ambient and 21°C-70°F inlet water temperatures).
- Cabinet and base finish, as well as all interior metal parts, in Stainless Steel.
- Easily removable front panel for routine maintenance & technical service access purposes.
- "Pierce Yourself" style incoming/outgoing utilities passages and internal connection turrets allow for maximum installation flexibility.
- Heavy-gauge stainless steel frame simplifies wall-mount installation.
- High-efficiency water cooling tank and coil.
- Stainless Steel basin is designed to eliminate splashing and stagnant water.
- Waterways are lead-free.
- Operable on 220-240 volts, 50/60 Hz.
- Special 110/60/1 model available upon request.
- Cooling system uses R-134a refrigerant.
- Complies with ADA requirements when properly installed.
- Limited 2 years Warranty against manufacturing defects.

Finish

Standard cabinet finish is Stainless Steel.

Options

WATTS non return valve kit factory installed.
AISI 316 Stainless Steel finish.



SW 12 USPH-S Technologies



		[°C]	[°F]	[l/h]	[gal./h]
SW 12 USPH-S		8÷12	46÷53	50	13.2
					[WxDxH inches] 16x13x33/34
			 [v/Hz/ph] 230/50-60/1	 R 134 A	

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Pressure Water Cooler

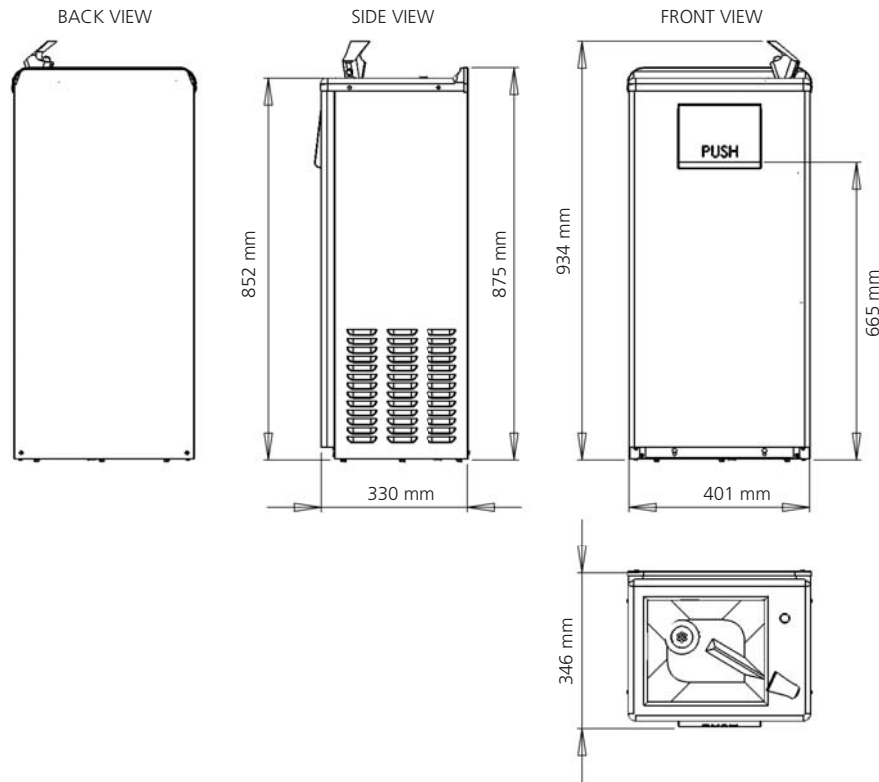

Can be used free standing or wall tight to avoid unsightly connections. Exclusive Projector Design: 2-stream mound-building projector and automatic stream regulator. Plumbing Connections: enter directly into cabinet. Waste 24 mm (1") IPS. Supply 8 mm (3/8") IPS. Finish: stainless steel.

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

Model	Icon	Flow Rate	Power	Water Temp	Water Temp	Water Temp	Water Temp	Water Temp	Water Temp	Water Temp	Water Temp
		[Btu/h]	[W]	[°C]	[°C]	[°C]	[°C]	[°C]	[°C]	[°C]	[°C]
SW 12 USPH-S	Icon of water tap	1208	353	3x1	250	10	33	73	36	79	

Equipment specifications may change without notice.