

Other models in this range:  
 MAR 56 - MAR 76 - MAR 106  
 MAR 206 - MAR 306  
 Split versions:  
 MAR 78 - MAR 128 - MAR 208  
 MAR 308

## Scale Ice Maker Units up to 1000 Kg



ABS Ice Chute Cover: sold separately.



Gear box protection (hall effect)



Easy to remove water sump



Pulleys & belt system allows to modify ice thickness




### Features

- Modular scale ice machine, production up to 1000 Kg in 24h (@ 2 mm. ice thickness only)
- Scale ice machine, in "compact system" version; built-in unit
- Storage bin not supplied, to be purchased separately
- AISI304 Stainless steel evaporator and ice scraper blade
- Redesigned evaporator compartment end-walls
- Foodgrade ABS plastic water sump tray, easy remove for cleaning and sanitising
- Electromechanical control panel
- Electrical protections, rotation speed & reverse phase controls
- Low- water sensor protection
- Hermetic compressor
- Choice of air or water cooled condenser
- Drive motor / gear reducer with V-Belt drive
- Storage bin thermostatic ice level sensor
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance

### Accessories & Optional Features (to be specified upon order):

- Ice spout cover (COVERMARS0000)
- Ice chute extension 90cm (KICMAREXT0001)
- Double ice chute 65cm (KICMARDOUBL02)
- Infrared ice sensor (replaces the thermostatic ice level control) ICE SENSOR0003
- UV lamp water sanitising system for bacterial control (KITUVLAMPMARO)
- ON/OFF manual switch, with daily timer (KITTIMER0001)
- ON/OFF manual switch, with weekly programmable timer (KITTIMERSET01)

### MAR 126 Technologies

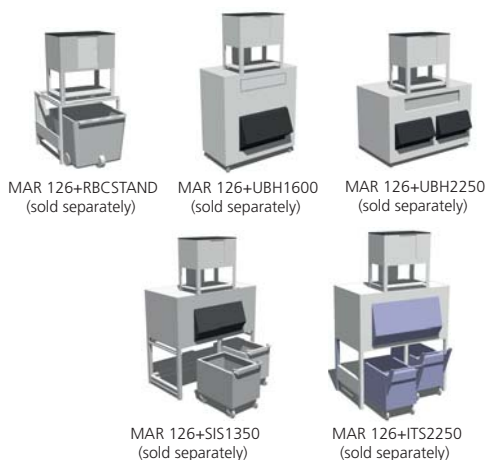

	 24h THICK ICE 2 mm [kg] [lbs]	 NOMINAL ONLY 0.5 mm [kg] [lbs]	 [WxDxH mm] 906x813x1125	
			[WxDxH inches] 35 11/16 x 32 x 44 5/8	
MAR126 AS	 1000 2205	1450 3197	 [w/Hz/ph] 400/50/3N  R 404 A	
MAR126 WS	 1000 2205	1450 3197		
MAR126 WS-SW	 1000 2205	1450 3197		



Ice scales are the coldest form of ice. Formed at -6° to -12°Celsius, they are very dry, containing less than 2% residual water. Scales look like fragments of glass, have an irregular shape and a thickness that can be adjusted at 1 or 2 mm.

Residual water content 2%

This product qualifies for the following listings:



**2** Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001:2000

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)  
[www.scotsman-ice-on-tablet.com](http://www.scotsman-ice-on-tablet.com)

Models and specifications are subject to change without notice.

Other models in this range:  
 MAR 56 - MAR 76 - MAR 106  
 MAR 206 - MAR 306  
 Split versions:  
 MAR 78 - MAR 128 - MAR 208  
 MAR 308

## Scale Ice Maker Units up to 1000 Kg

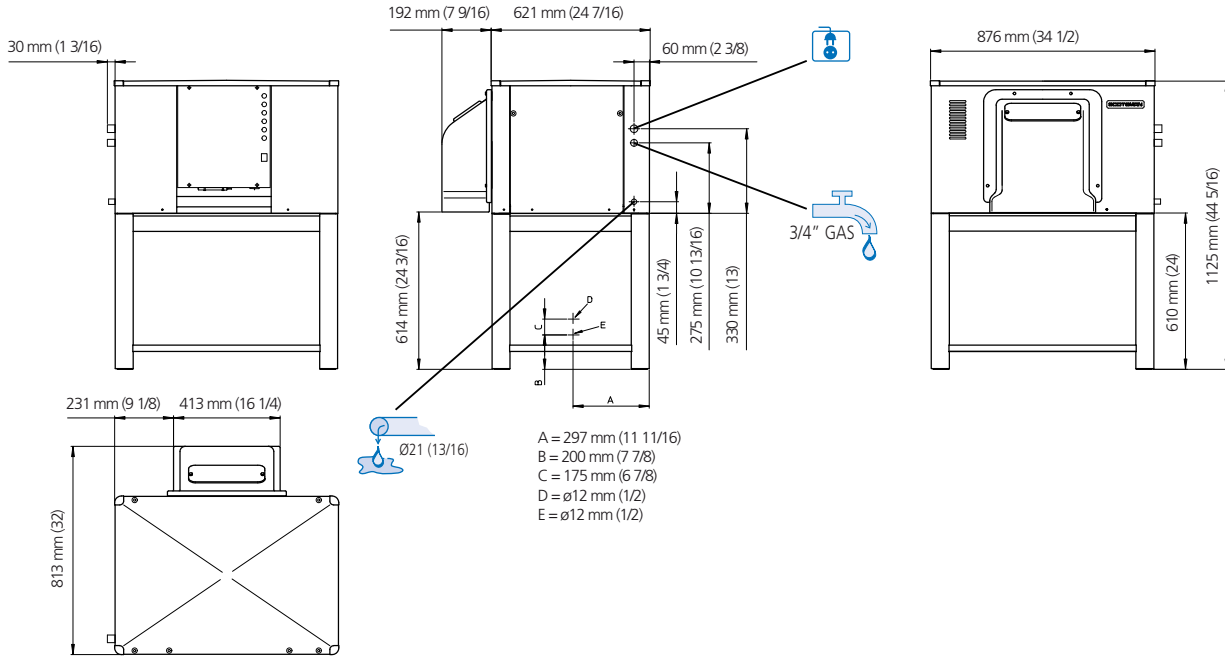

### MAR 126 AS

°C / °F	50° / 10°	60° / 15°	70° / 21°	90° / 32°	
10°	1000	980	960	920	kg
50°	2205	2160	2116	2028	lbs
21°	920	900	880	840	kg
70°	2028	1984	1940	1852	lbs
32°	820	800	780	740	kg
90°	1808	1764	1720	1631	lbs
38°	720	700	680	640	kg
100	1587	1543	1499	1411	lbs



WITH THICK ICE SETTINGS ONLY

### MAR 126 WS

°C / °F	50° / 10°	60° / 15°	70° / 21°	90° / 32°	
10°	1000	980	960	920	kg
50°	2205	2160	2116	2028	lbs



WITH THICK ICE SETTINGS ONLY

Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Standard TE (T cond.+54,5°C - T evap.-23,3°C)	[W]	[Btu/h]	[S mm <sup>2</sup> ]	[AWG]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
MAR 126 AS		5515	18800	5x1,5	AWG15	4500	16 A	13,8	32,5	8,6	209	460	226	498
MAR 126 WS		5515	18800	5x1,5	AWG15	4500	16 A	11,3	n.a.	n.a.	205	451	222	488

\*SW sea water cooling only