

Self Contained Ice Machine up to 50 Kg



Routine Maintenance Alarm



Front ON-OFF Switch
Storage bin antibacterial pouch & holder

Spray bar quick disconnect



Proximity condenser air filter



Patented anti-Scale system




Easy bin access



Hygienic scoop holder

Available as optional KITLGSEXT000

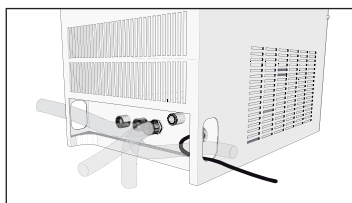

Features

- Produces individual Gourmet crystal clear supercubes
- Up to 50 kg (110 lbs) daily ice cubes production
- Up to 23 kg (50 lbs) ice storage capacity
- Resistant stainless steel exterior
- Simple and reliable electromechanic controls
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Water system protected by patented anti-scale system
- Optional PWD System for remote water drain (easy -fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-134a Refrigerant
- 3 years manufacturer warranty

AC 106 Technologies



Model	Compressor	10°: 10°C			21°: 15°C			Storage Capacity	Dimensions (mm)
		[kg]	[lbs]	N°*	[kg]	[lbs]	N°*		
ACM 106 AS	+	50	110	2500	46	101	2300	23 50 1150	530x600x850/970
ACM 106 WS	-	50	110	2500	46	101	2300	23 50 1150	[WxDxH inches] 20"x23"x33"/38"
ACL 106 AS	+	50	110	1280	46	101	1180	23 50 590	

*Estimate number of small, medium or large size gourmet cubes.
Standard legs 120 mm high included. **Optional: PWD System.**



[v/Hz/ph]
230/50/1



R 134a

Medium Gourmet
20 g



Ø 29 x H 34 mm

Large Gourmet
39 g



Ø 38 x H 41 mm

This product qualifies for the following listings:



3 Years Warranty

Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.